
Dimension Guide

Single door refrigeration

Models:

ERE5047SB, EFE4227SB

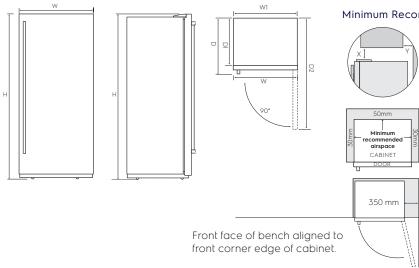

Minimum Recommended Airspaces


If you have a cupboard above the refrigerator with a rear gap of less than 100mm (Y), recommended minimum clearance at the top of the refigerator increases from 30mm to 70mm (X).


Please note: Doors are designed to sit proud of cabinetry (not flush).


When positioned in a corner area, spacing of at least 400mm on the hinge side will allow the doors to open enough to enable the removal of bins and shelves.

Single Door	Door width	Total depth	Maximum	Cabinet	Cabinet depth	Depth door
Models	(W)	(D)	height (H)	width (W1)	(D1)	open (D2)
ERE5047SB, EFE4227SB	699	773	1725	693	641	

Modular refrigeration







50mm 50mm Minimum recommended dirspace CABINET CABINET DOOR DOOR

Please note:

Doors are designed to sit proud of cabinetry (not flush).

Joined cabinet dimensions

	al cabinet s (W1)	cabinet height	max door height	joined cabinet width	joined door width	max total depth	max cabinet depth
model 1	model 2	(H1)	(H)	(Wa)	(Wb)	(D)	(D1)
693	693	1705	1725	1407	1419	773	641
693	790	1705	1725	1504	1516	773	641
790	790	1705	1725	1601	1613	773	641

For connection kit installation instructions go to electrolux.com.au

Important! Please ensure that the access to your kitchen (including doorways, corridors, island benches, etc) allows sufficient clearance to move your fridge into position.

Please note! Dimensions to be used as a guide only. All customers MUST refer to the user manual supplied with the product for detailed installation instructions.

© 2019 Electrolux Home Products Pty Ltd. EDIM_SingleDoor_Jan19

